

L-14 表面混合烧嘴


火焰抛光，边缘熔化，镀层，针对桌面玻璃和啤酒杯玻璃各种成型，退火，二玻璃工艺品，容器，器皿的二次加热。

GROUP L-14 线性烧嘴

- 范围:RPLSMDJ;
- 氧气 - 燃气;
- 50-200 火焰长度×2排。

供应压力需求

- 天然气: 20-1000mbar;
- 丙烷: 20-1000mbar;
- 氢气: 350-1000mbar;
- 氧气: 1-4bar。

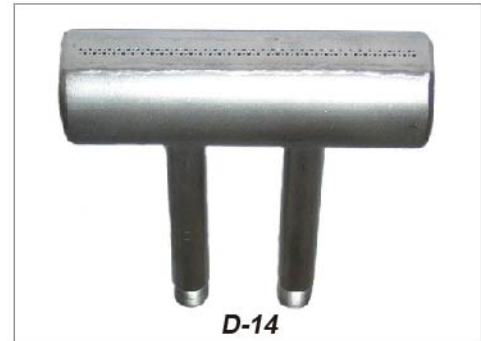

产品参数

样本号	型号	A (mm)	B (mm)	C (mm)	D 燃气入口尺寸 (inch)	功率 (Kcal/hr)
L350	RPLSMDJ-50	50	57	25	1/8" BSP	9.95
L351	RPLSMDJ-75	75	82	40	1/8" BSP	14.90
L352	RPLSMDJ-100	100	107	50	1/8" BSP	19.50
L353	RPLSMDJ-150	150	157	75	1/4" BSP	29.50
L354	RPLSMDJ-200	200	207	100	1/4" BSP	39.30

